


TECHNICAL DATA

Capacity	3500 kg
Effective raise height	2023 mm
Drive over height	60 mm
Piston diameter	123 mm
Piston distance	1500 mm
Installation depth	2305 mm
Motor output	3,0 kW
Power connector	400 V/16 A
Cable length to control	11 m
Lifting time	≈ 35 sec.
Lowering time	≈ 35 sec.

Support Uni 2.35 plus Hybrid	111841
Tube cassette STEEL 1500 mm galvanized	273110
PVC pipes for tube cassette length: 1970 mm, ø 315mm, 1 set = 2 pieces	112754
Lifting unit oil 3,5 t 1500 mm Hybrid - H packed in wooden box for subs. installation into H cassette	111877




ACCESSORIES

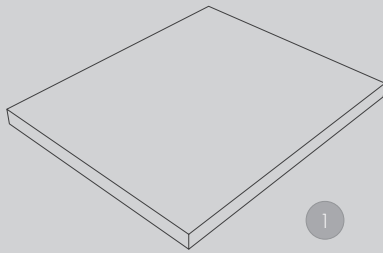


1

- 1 | Rubber pad
290 x 335 x 20 mm
102275 (1 Set / 4 Pieces)




2

- 2 | Rubber pad
120 x 120 x 40 mm
102274 (1 Set / 4 Pieces)




3

- 3 | Rubber pad pyramid
70 mm
102273 (1 Set / 4 Pieces)



4

- 4 | Rubber pad pyramid
140 mm
102291 (1 Set / 4 Pieces)

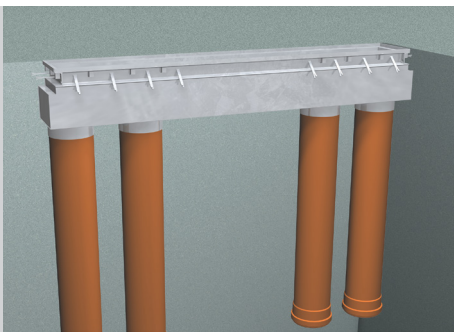

- Tube cassette Future Proof
Steel galvanized 1500/2530 mm
275110

Herrmann AG
Bahnhofstrasse 32
D-93483 Pöding

Phone: +49 (0)9461/91388 50
E-Mail: sales@herrmann-lifts.com

www.herrmann-lifts.com