


## SURFACE MOUNTED

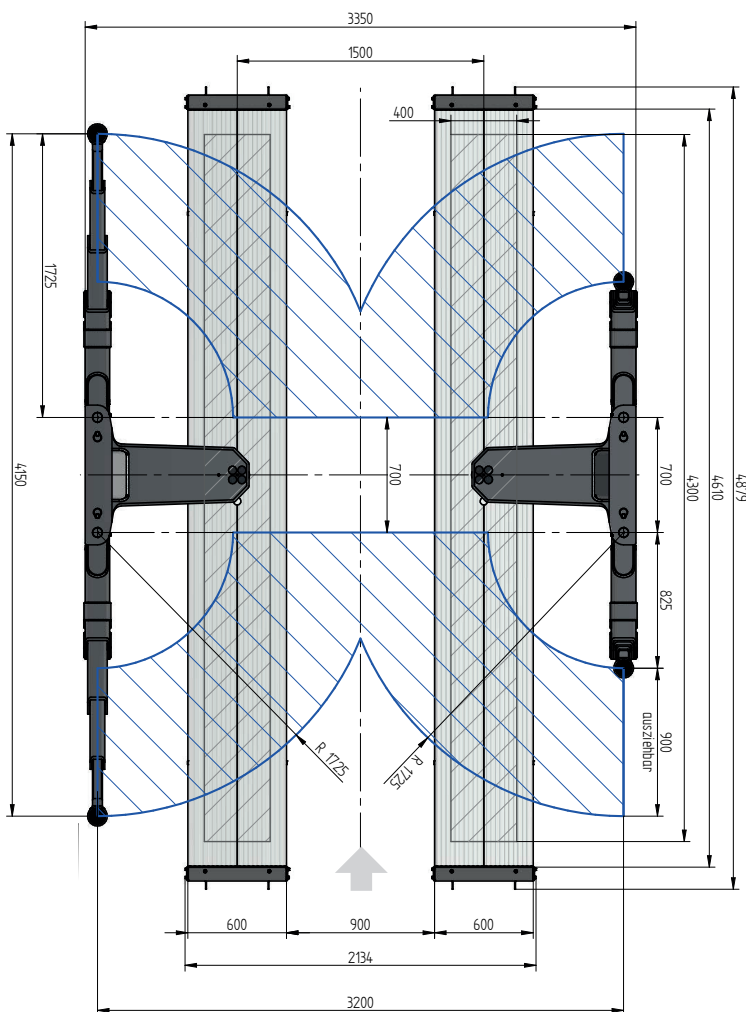


## TECHNICAL DATA

capacity	5000 kg
wheel free lift	5000 kg
effect. raise height platform	1995 mm
effect. raise height wheel free unit	1979 mm
platform length	4800 mm
platform height	180 mm
drive over height wheel free unit	120 mm
piston diameter	123 mm
piston distance	1500 mm
installation depth	2443 mm
motor output	3,0 kW
power connector	400 V/16 A
cable length to control	11 m
lifting time	≈ 35 sec.
lowering time	≈ 35 sec.


Platform support Alu Track 2.50 Duplo	102756
Support Swingarm 2.50-1500	112120
Installation cassette STEEL 1500 mm	2190XX
Installation cassette STEEL 1500 mm galvanized	2191XX
Lifting unit oil 5,0 t Duplo 5,0 t 1500 mm - K pre-assembled in installation cassette	111616
Lifting unit oil 5,0 t Duplo 5,0 t 1500 mm - H packed in wooden box	111617

# ALU TRACK 2.50 DUPLO SWING


## ACCESSORIES

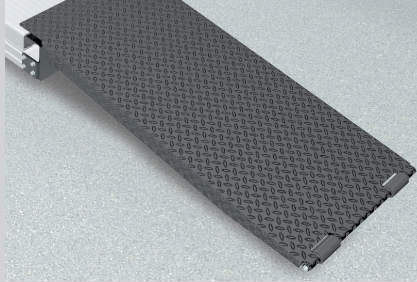

Drive on ramp  
1250 mm  
102347




Drive on stop  
102349




Lighting  
LED  
111598




Slide rail  
4800 mm  
102375

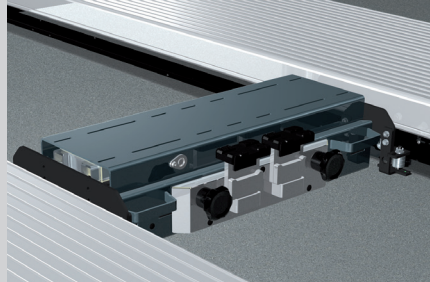

Axle lifter 2600 kg  
pneumatic, without slide rails  
105063

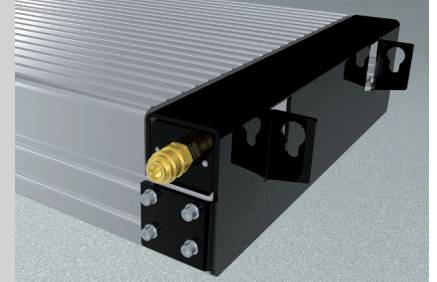


Compressed air supply  
102407




### Wheel lifting device (1 set / 4 pcs.)

GA490      GA550  
ø wheel 590 - 690 mm    ø wheel 670 - 770 mm  
112051      112052


Mounting adapter  
Swingarm/Duplex  
(1 set / 4 pcs.)  
112146

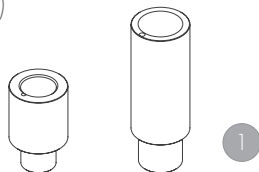

1 Stacking adapter extension  
89 mm      127 mm  
d 50 x 89 mm    d 50 x 127 mm  
109679 (1 Set / 4 Pieces)    109680 (1 Set / 4 Pieces)



2 Stacking adapter  
V-shape  
d 50 / 155 - 255 mm  
112107 (1 Set / 4 Pieces)



3 Stacking adapter  
U-form  
d 50  
110397 (1 Set / 4 Pieces)

**Herrmann AG**  
Bahnhofstrasse 32  
D-93483 Pöding

+49 (0)9461/91388 50  
sales@herrmann-lifts.com  
www.herrmann-lifts.com