
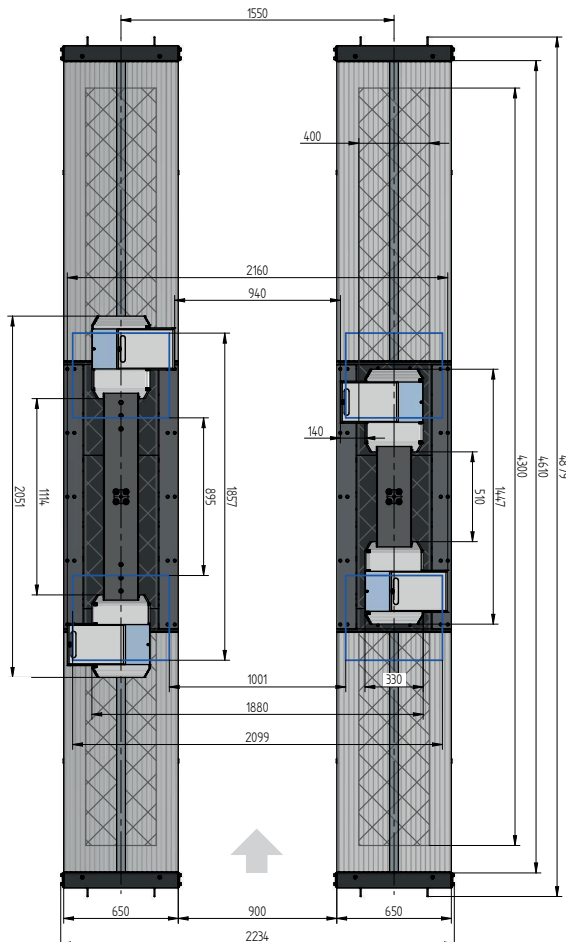


SURFACE MOUNTED

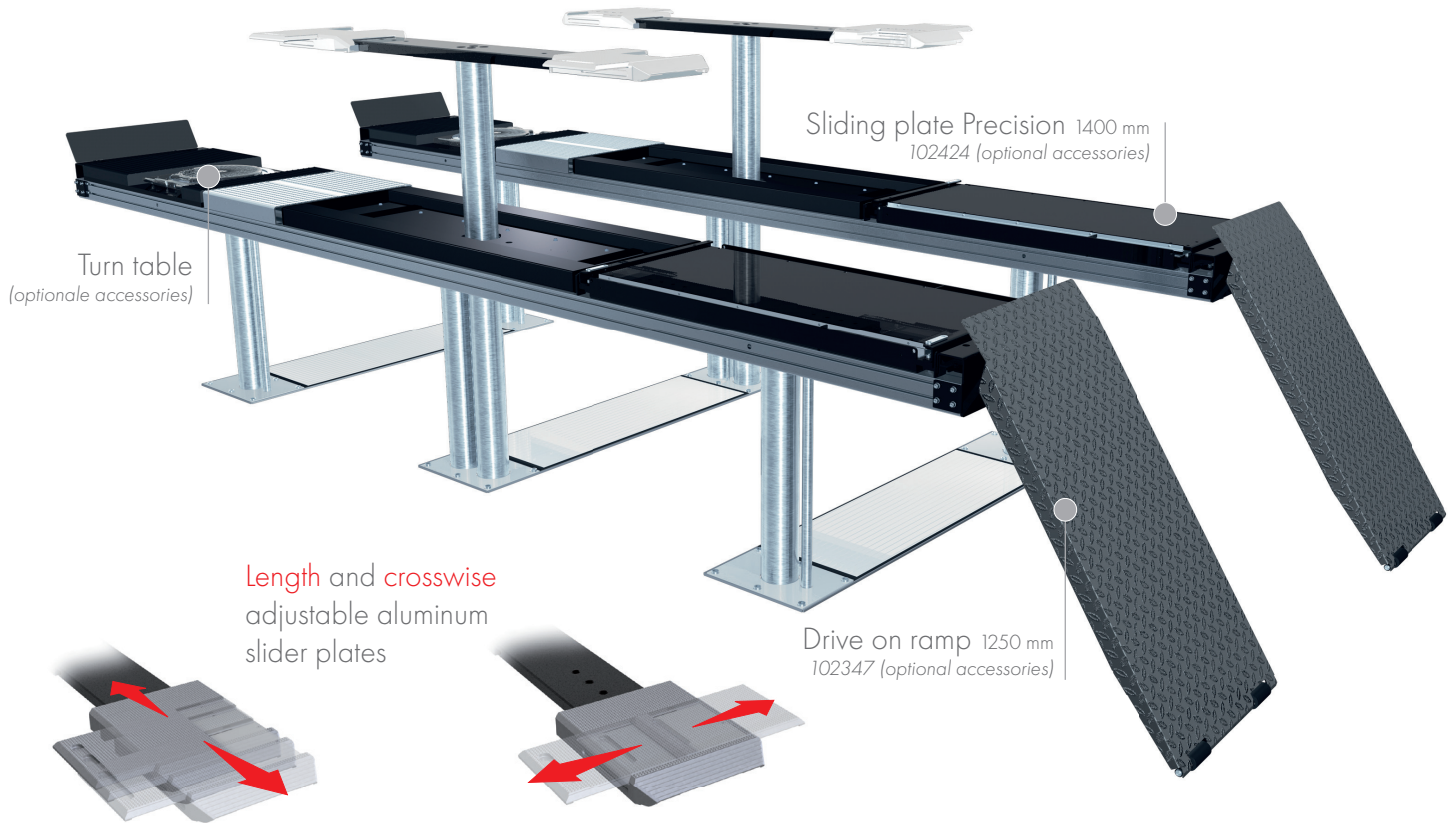


TECHNICAL DATA

capacity	4000 kg
wheel free lift	3500 kg
effect. raise height	2008 mm
effect. raise height wheel free unit	1982 mm
platform length	4800 mm
platform height	180 mm
drive over height wheel free unit	60 mm
piston diameter	123 mm
piston distance	1550 mm
installation depth	2443 mm
motor output	3,0 kW
power connector	400 V/16 A
cable length to control	11 m
lifting time	≈ 35 sec.
lowering time	≈ 35 sec.


Platform support Alu Track 4.40/2.35 with platform notches for wheel free system flush with platform	108615
Platform support Alu Track 4.40 with platform notches for wheel free system flush with platform and joint play tester	108614
Platform support Alu Track 4.40 with platform notches for wheel free system flush with platform, turn tables and sliding plates	108368
Installation cassettes STEEL 1550 mm	2430XX
Installation cassettes STEEL 1550 mm galvanized	2431XX
Lifting unit oil 4,0 l 1550 mm - K pre-assembled in installation cassette	111611
Lifting unit oil 4,0 l 1550 mm - H packed in wooden box	111612

ALU TRACK 4.40/2.35


ACCESSORIES




Drive on ramp
1250 mm
102347




Sliding plate
Precision 1400 mm
102424




Lighting
LED
111598

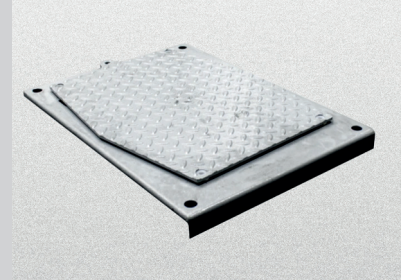


Joint play tester
108613



Slide rail
4800 mm
102375

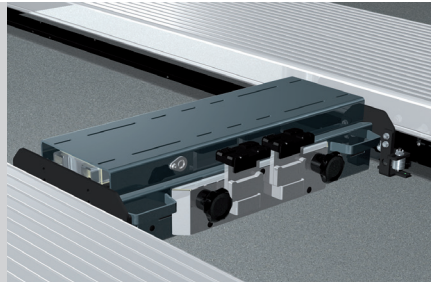


Axle lifter 2600 kg
pneumatic, without slide rails
105063

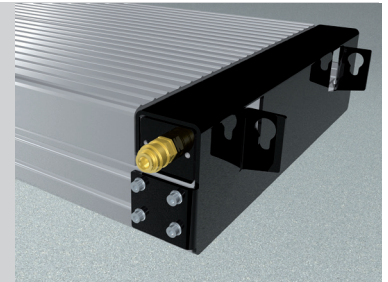

Compressed air supply
102407




Wheel alignment supports
1350 mm 600 mm
102377 102381

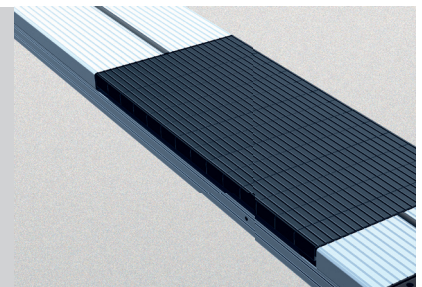

Rubber elements
50 mm 100 mm 200 mm
111677 111678 111679

Herrmann AG
Bahnhofstrasse 32
D-93483 Pöding

Phone: +49 (0)9461/91388 50
E-Mail: sales@herrmann-lifts.com

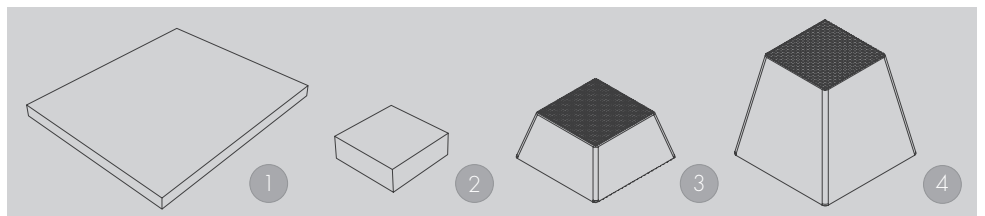

Rubber pads
1 | 290 x 335 x 20 mm | 102275
2 | 120 x 120 x 40 mm | 102274

Rubber pads Pyramid
3 | 70 mm | 102273
4 | 140 mm | 102291

www.herrmann-lifts.com